


# Flat Entry 4P4C Plug (Stranded Wires)

## PRODUCT SPECIFICATION

### Package includes:

A. Flat Entry 4P4C Plug, 100 pcs

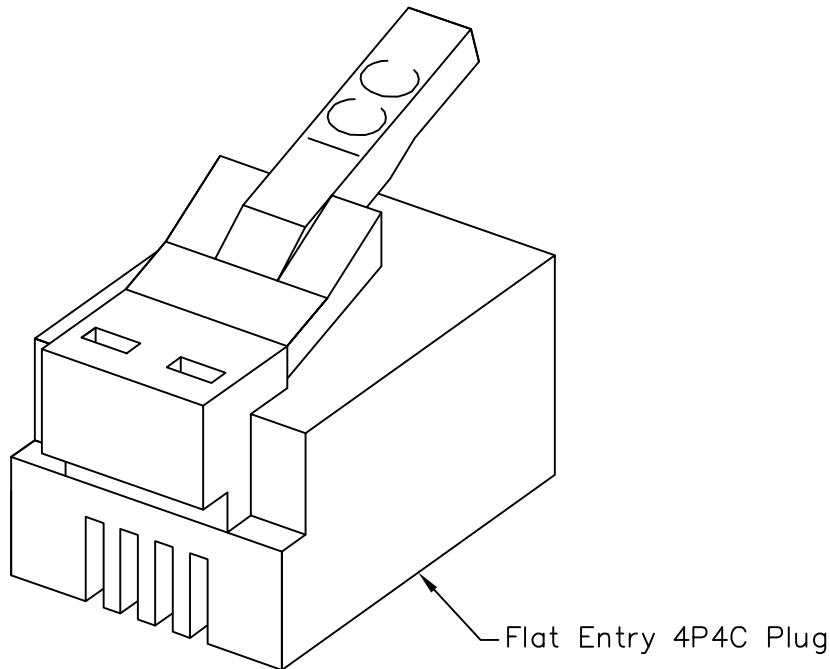

### Features and Benefits:

- Designed for 4-position 4-conductor, stranded wires, flat line cord entry
- Ideal for customization of cords for voice or other low speed transmission applications
- Accepts 28~24 AWG stranded wires
- Used with ICACSCT864 crimping tool
- UL recognized






### PLUG, 4P4C, FLAT ENTRY, STRANDED, 100 PK

ITEM NO.	ICMP4P4CHS
DWG NO.	PSMP4P4CHS

REV.	A
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com



**NOTE: UNLESS OTHERWISE SPECIFIED**

**1. ELECTRICAL:**

- A. UL APPLICATIONS: RATED 2A, 150V
- B. DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC
- C. INSULATION RESISTANCE: 500 MOHMS
- D. TERMINATION RESISTANCE: 35 MILLIOHMS MAX AFTER ENVIRONMENTAL TESTING

**2. MECHANICAL:**

- A. CABLE-TO-PLUG TENSILE STRENGTH: 20 LBS [89N] MIN
- B. DURABILITY: 200 MATING CYCLES

**3. MATERIAL & FINISH:**

- A. HOUSING: PC, UL 94V-2
- B. COLOR: CLEAR
- C. CONTACT: PHOSPHOR BRONZE, GOLD PLATING OVER 100 MICRO INCH NICKEL
- D. GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
- E. CONDUCTOR: 24, 26, 28 AWG STRANDED

**PLUG, 4P4C, FLAT ENTRY, STRANDED, 100 PK**



Premium Products  
Proven Performance  
Competitive Prices

ITEM NO. ICMP4P4CHS

REV. A

DWG NO. PSMP4P4CHS

PAGE NO. 2

CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com